

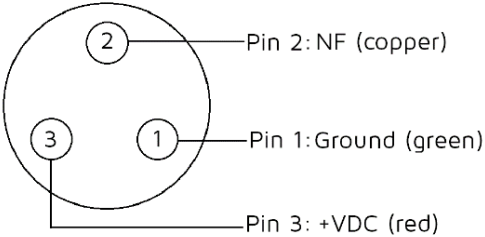
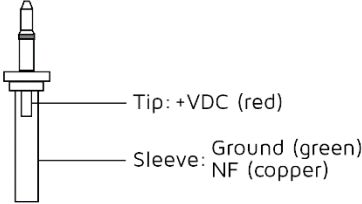
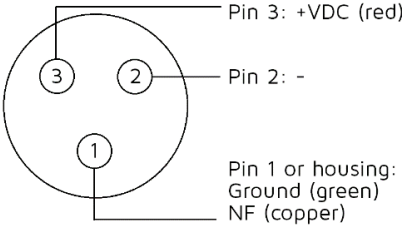
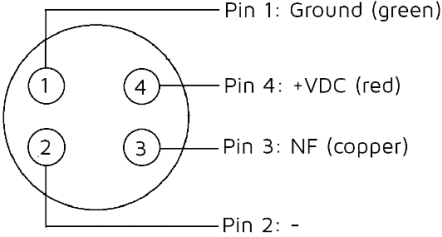
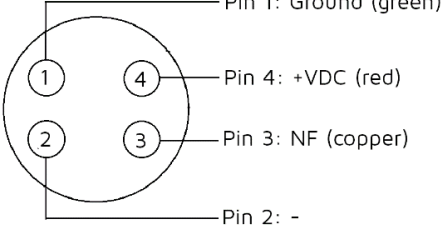


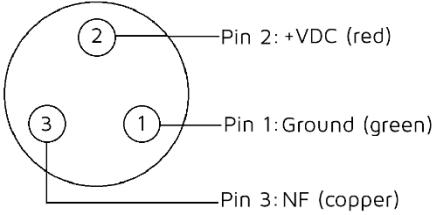
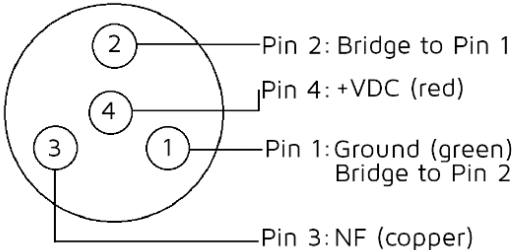
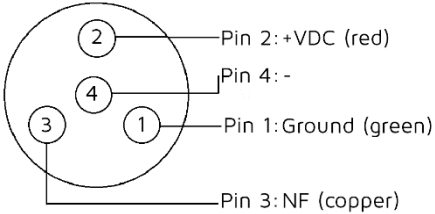
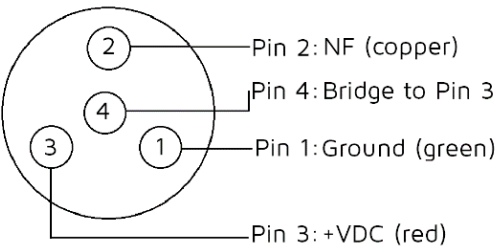
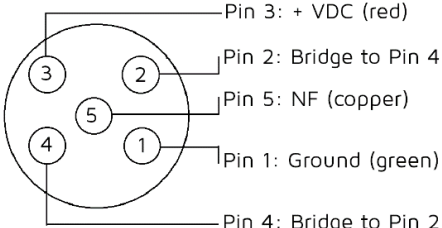
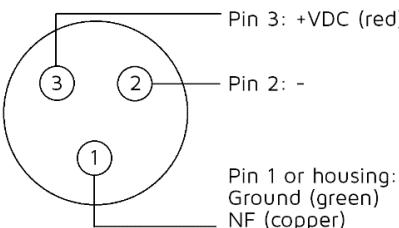
Swiss precision for excellent audio quality

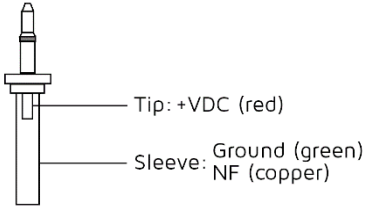
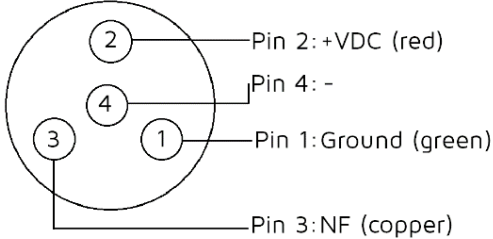
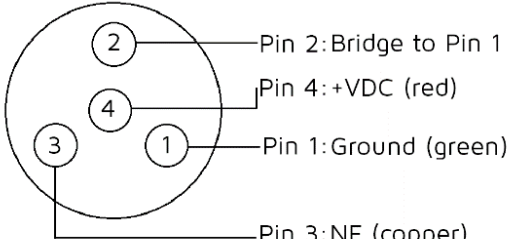
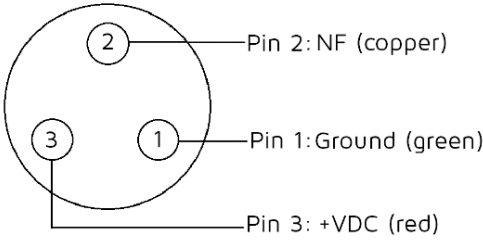


# VOICE TECHNOLOGIES

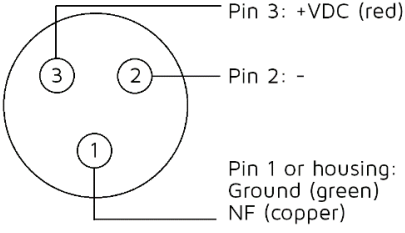
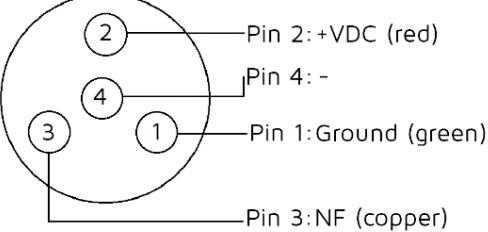
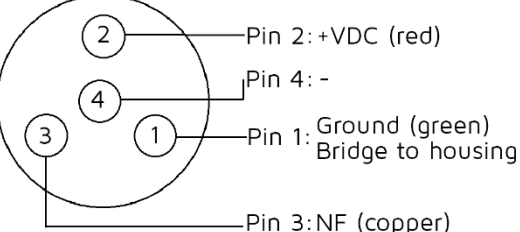
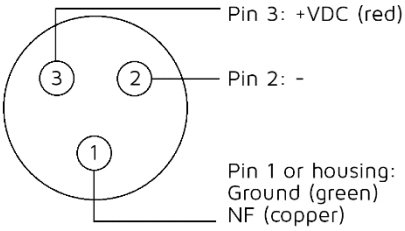

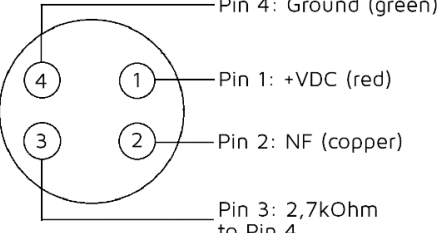
## Wiring

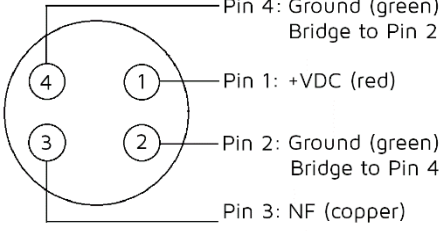
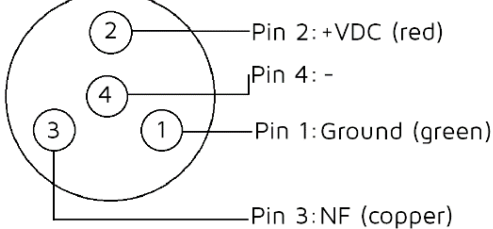
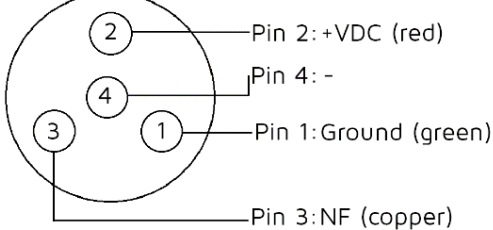
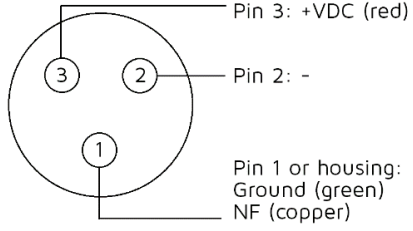
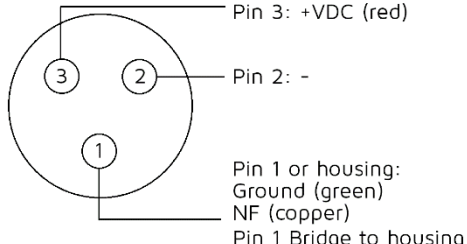
### VT500 / 506 / WATER / WA / X-TREME

Brand	Connector	Wiring
AKG	TA3F	
AKG B-Lock	3.5 mm Mono	
Audio Limited	Lemo 3-Pin	
Audio Technica	Hirose 4-Pin	
Audio Technica	Hirose_ch 4-Pin	

Brand	Connector	Wiring
Audix	TA3F	 <p>Pin 2: +VDC (red) Pin 1: Ground (green) Pin 3: NF (copper)</p>
Beyerdynamic Opus	TA4F	 <p>Pin 2: Bridge to Pin 1 Pin 4: +VDC (red) Pin 1: Ground (green) Bridge to Pin 2 Pin 3: NF (copper)</p>
Beyerdynamic TG-Series	TA4F	 <p>Pin 2: +VDC (red) Pin 4: - Pin 1: Ground (green) Pin 3: NF (copper)</p>
Electro Voice	TA4F	 <p>Pin 2: NF (copper) Pin 4: Bridge to Pin 3 Pin 1: Ground (green) Pin 3: +VDC (red)</p>
Lectrosonics SM-Series	TA5F	 <p>Pin 3: +VDC (red) Pin 2: Bridge to Pin 4 Pin 5: NF (copper) Pin 1: Ground (green) Pin 4: Bridge to Pin 2</p>
Lectrosonics	Lemo 3-Pin	 <p>Pin 3: +VDC (red) Pin 2: - Pin 1 or housing: Ground (green) NF (copper)</p>

Brand	Connector	Wiring
Lectrosonics	WPMC 2.5 mm Mono	
Line 6	TA4F	
Mipro	TA4F	
Monacor	TA3F	
Rode	3.5 mm Stereo	
Sennheiser Evolution & AVX	3.5 mm Stereo	

Brand	Connector	Wiring
Sennheiser prof. series	Lemo 3-Pin	 <p>Pin 3: +VDC (red)</p> <p>Pin 2: -</p> <p>Pin 1 or housing: Ground (green) NF (copper)</p>
Shure	TA4F	 <p>Pin 2: +VDC (red)</p> <p>Pin 4: -</p> <p>Pin 1: Ground (green)</p> <p>Pin 3: NF (copper)</p>
Shure digital	TA4F	 <p>Pin 2: +VDC (red)</p> <p>Pin 4: -</p> <p>Pin 1: Ground (green) Bridge to housing</p> <p>Pin 3: NF (copper)</p>
Shure	Lemo 3-Pin	 <p>Pin 3: +VDC (red)</p> <p>Pin 2: -</p> <p>Pin 1 or housing: Ground (green) NF (copper)</p>
Sony	3.5 mm Stereo	 <p>Tip: NF (copper)</p> <p>Ring: +VDC (red)</p> <p>Sleeve: Ground (green)</p>
Sony	Hirose 4-Pin (old version)	 <p>Pin 4: Ground (green)</p> <p>Pin 1: +VDC (red)</p> <p>Pin 2: NF (copper)</p> <p>Pin 3: 2,7kOhm to Pin 4</p>

Brand	Connector	Wiring
Sony	Hirose 4-Pin (new version)	 <p>Pin 4: Ground (green) Bridge to Pin 2</p> <p>Pin 1: +VDC (red)</p> <p>Pin 2: Ground (green) Bridge to Pin 4</p> <p>Pin 3: NF (copper)</p>
Telex	TA4F	 <p>Pin 2: +VDC (red)</p> <p>Pin 4: -</p> <p>Pin 1: Ground (green)</p> <p>Pin 3: NF (copper)</p>
Toa	TA4F	 <p>Pin 2: +VDC (red)</p> <p>Pin 4: -</p> <p>Pin 1: Ground (green)</p> <p>Pin 3: NF (copper)</p>
Wisycom	Lemo 3-Pin	 <p>Pin 3: +VDC (red)</p> <p>Pin 2: -</p> <p>Pin 1 or housing: Ground (green) NF (copper)</p>
Zaxcom	Lemo 3-Pin	 <p>Pin 3: +VDC (red)</p> <p>Pin 2: -</p> <p>Pin 1 or housing: Ground (green) NF (copper) Pin 1 Bridge to housing</p>