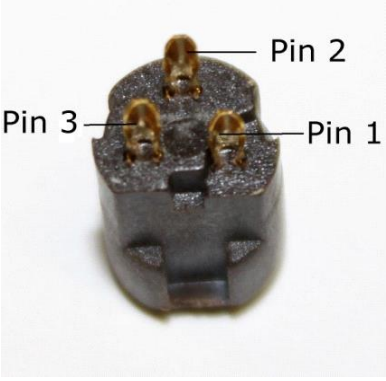
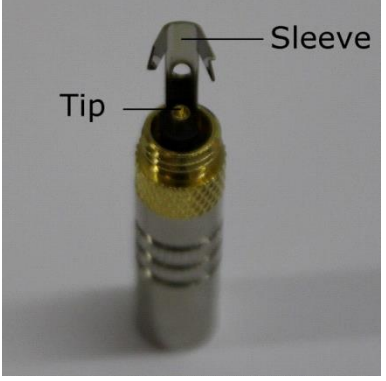
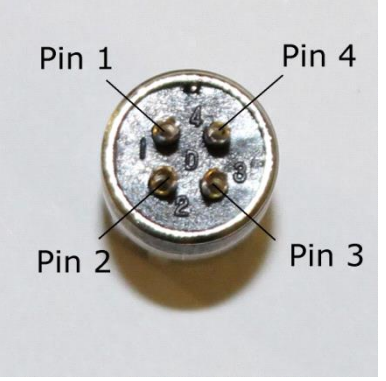


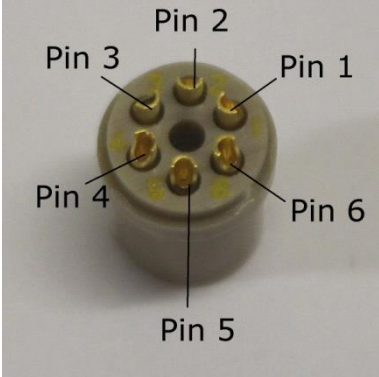
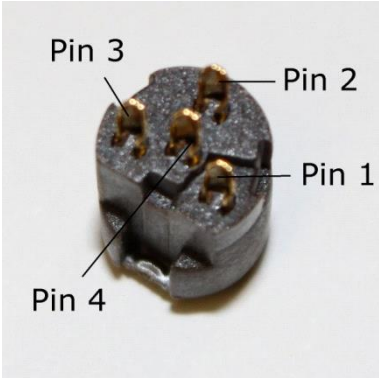
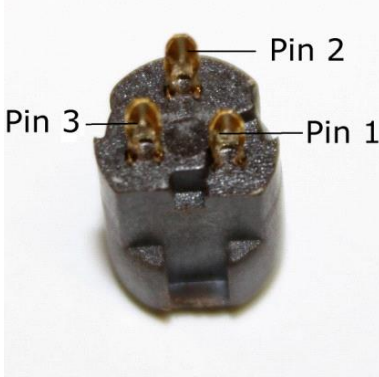
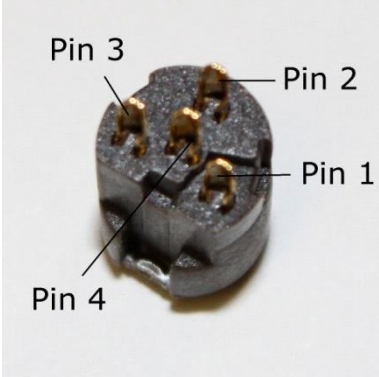


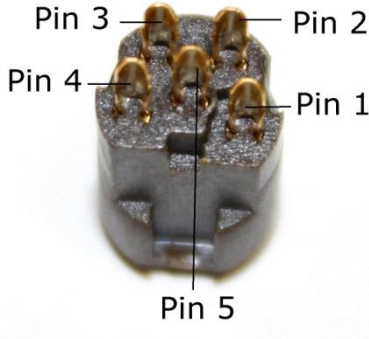
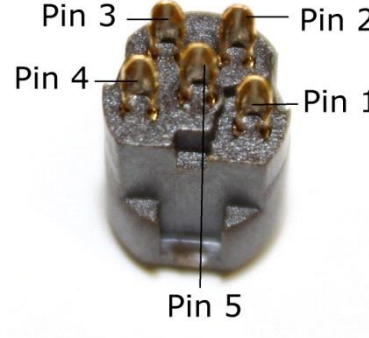
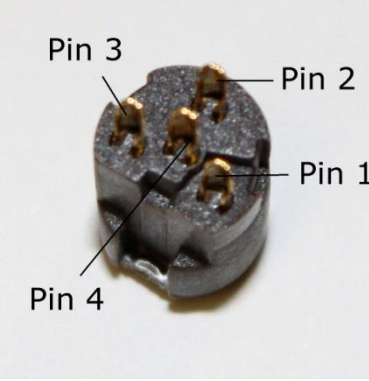
Swiss precision for excellent audio quality

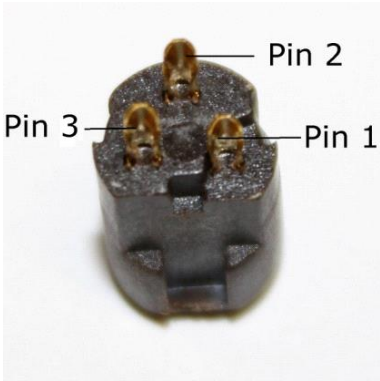
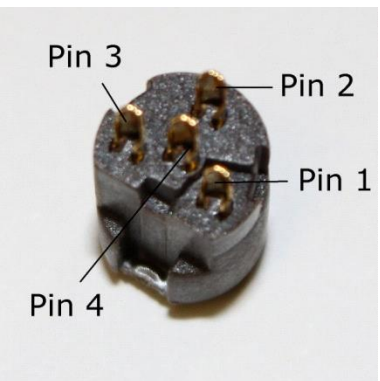
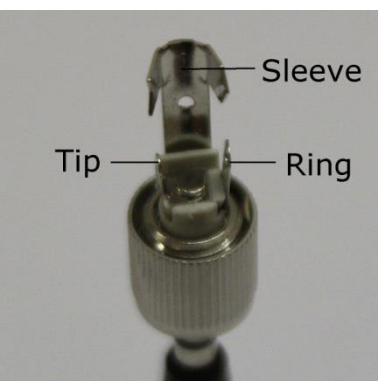
VOICE TECHNOLOGIES

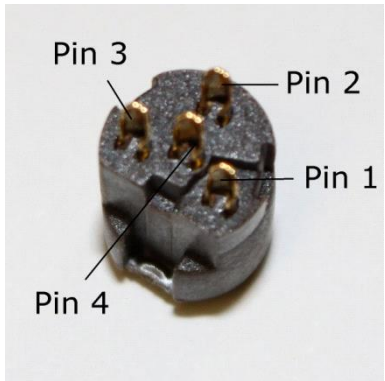
Connection for VT701MKII/901MKII/DUPLEX

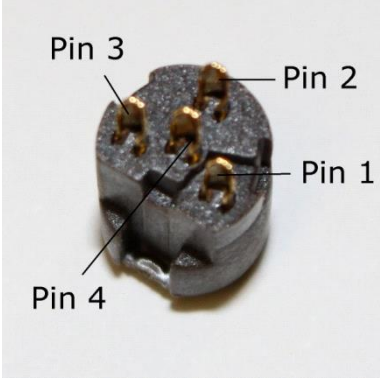
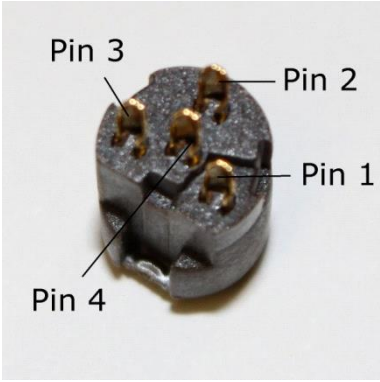

| Connection with color code | Picture | Connector type | Brand, type |
|--|---|----------------|----------------|
| Pin 1: Ground (copper) Pin 2: NF (red) Pin 3: 15Kohm to Pin 2 |  | TA3F | AKG |
| Sleeve: Copper Tip: red |  | 3.5 mm mono | AKG B-Lock |
| Pin 1: Ground (copper) Pin 2: - Pin 3: NF (red) Pin 4: 15 kOhm to Pin 3 |  | Hirose 4pin | Audio Technica |

| Connection with color code | Picture | Connector type | Brand, type |
|--|---|----------------|---------------|
| Pin 1: NF (red) Pin 2: 15 kOhm to Pin 1 Pin 3: bridged to Pin 4 Pin 4: bridged to Pin 3 Pin 5: Ground (copper) Pin 6: - |  | Lemo 6pin | Audio Ltd. |
| Pin 1: Ground (copper) bridged to Pin 2 Pin 2: bridged to Pin 1 Pin 3: NF (red) Pin 4: 15 kOhm to Pin 3 |  | TA4F | Beyerdynamic |
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) |  | TA3F | Comtek |
| Pin 1: Ground (copper) Pin 2: NF (red) Pin 3: 15 kOhm to Pin 2 Pin 4: bridged to Pin 3 |  | TA4F | Elektro Voice |

| Connection with color code | Picture | Connector type | Brand, type |
|--|---|----------------|---------------------------------|
| Pin 1: Ground (copper) Pin 2: - Pin 3: 15 kOhm to pin 5 Pin 4: - Pin 5: NF (red) |  | TA5F | Lectrosonics SM series |
| Pin 1: bridged to Pin 4 Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) Pin 4: Ground (copper) Bridged to Pin1 Pin 5: - |  | TA5F | Lectrosonics UM/LM Series (alt) |
| Pin 1: Ground (copper) Pin 2: bridged to Pin 1 Pin 3: NF (red) Pin 4: 15 kOhm to Pin 3 |  | TA4F | Mipro new series |
| Pin 1: Ground (copper) Pin 2: NF (red) Pin 3: 15 kOhm to Pin 2 |  | TA3F | Monacor |

| Connection with color code | Picture | Connector type | Brand, type |
|--|---|----------------|---|
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) |  | TA3F | Nady |
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) Pin 4: - |  | TA4F | Sabine SW7000 |
| Sleeve: (copper) Tip: red |  | 3.5 mm stereo | Sennheiser Evolution series |
| | Ask for a manual | Lemo 3pin | Sennheiser professional series 2000/3000/5000 |

| Connection with color code | Picture | Connector type | Brand, type |
|---|---|-------------------|--------------------------|
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) Pin 4: - |  | TA4F | Shure TA4F |
| Pin 1: 15 kOhm to Pin 2 Pin 2: NF (red) Pin 3: 2,70 kOhm to Pin 4 Pin 4: Ground (copper) |  | Hirose 4pin SMC-9 | Sony SMC-9 (Hirose 4pin) |
| Sleeve: Ground (copper) Tip: NF (red) Ring: 15 kOhm to Tip |  | 3.5 mm stereo | Sony 3.5 mm stereo |
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) Pin 4: - |  | TA4F | Toa |

| Connection with color code | Picture | Connector type | Brand, type |
|--|---|----------------|--------------------------|
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 3 Pin 3: NF (red) Pin 4: - |  | TA4F | Telex |
| Pin 1: Ground (copper) Pin 2: 15 kOhm to Pin 4 Pin 3: - Pin 4: NF (red) |  | TA4F | Trantec |
| Same as Sennheiser SK50 | Ask for a manual | Lemo 3 pin | Wisycm Zaxcom |
| Sleeve: copper Tip: red | Ask for a manual  | 2.5 mm mono | Lectrosonics WM-Serie |